
## Cabka



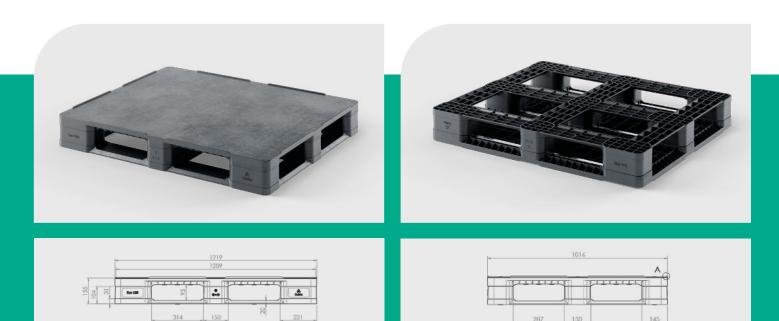

CD-6R-M

48 x 40 in 1219 x 1016 mm 

Maximum Load Capacities (lbs) / (kg) Weight (Ibs) / (kg) Bottom **Technical Data** Top Deck Dimensions (in) / (mm) support Static Dynamic Racking PE PP PO 48 x 40 x 6.1 11200 5500 2800 \_ 54.0 \_ Eco US5 (CD-6R-M) 6 runners closed 1219 x 1016 x 155 5100 2500 1250 24,5 \_

Entry: 4 ways | Nesting height: - inch / - mm | Safety rim: 0.2 in / 6 mm

Logistic Data	Standard Truck Europe		Standard Truck USA		Mega Truck		Jumbo Truck		40' HC Container	
	stack	total	stack	total	stack	total	stack	total	stack	total
Eco US5 (CD-6R-M)	-	-	17	510	-	-	-	-	-	-

Options

- 1. Universal multi-trip pallet for applications in closed circuits, production Benefits plants and goods distribution.
  - 2. Designed to offer high performance and durability.
  - 3. Perfectly suited for high racks.
  - 4. High impact strength reduces the risk of damage, extending the service life.
  - 5. Equipped with additional metal reinforcement.
  - 6. Reusable pallet made of recycled plastic and 100% recyclable

- Safety rim. 1.
- 2. Anti slip strips and grommets on and under deck.
- 3. RFID transponders and other IoT options.
- 4. Specific colors on request.
- 5. Individual marking and labelling.
- 6. HACCP-compliant PP with FDA approval (freezer additives available).

The contents of this publication are presented for general informational purposes only. Technical data are guideline values based on experience and tests under defined conditions. The data may vary based on intended use, product features, raw materials used and environmental influences. Nothing in this document shall be construed as warranties or guarantees, express or implied, regarding the products or their use, application, performance or otherwise. Upon request our sales team will confirm the data required for your individual application.