


Eco i5

OD-3R


1200 x 1000 mm

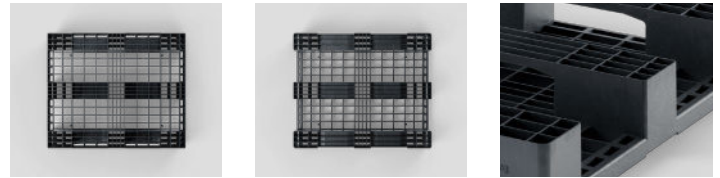

Technical Data	Bottom support	Top Deck	Dimensions (mm)	Maximum Load Capacities (kg)			Weight (kg)		
				Static	Dynamic	Racking	PE	PE Mix	PP Mix
Eco i5 (OD-3R)	3 runners	open	1200 x 1000 x 150	4000	1500	300	12,5	12,5	13,5

Entry: 4 ways | Nesting height: - mm | Safety rim: 6,5 mm

Logistic Data	Standard Truck Europe		Standard Truck USA		Mega Truck		Jumbo Truck		40' HC Container	
	stack	total	stack	total	stack	total	stack	total	stack	total
Eco i5 (OD-3R)	16	416	-	-	19	494	19	532	17	374

Benefits

1. High performance at low cost
2. Monoblock design with impressive weight/load ratio
3. Ideal for closed loops, distribution, production areas and export
4. Strong performance with roller conveyors and in high racks
5. Flow-through block design ensures effective cleaning and quick drying
6. Rounded corners to reduce potential fork access damage
7. Reusable pallet made of recycled plastic and 100% recyclable

Options

1. Safety rim
2. RFID transponders and other IoT options
3. Specific colors on request
4. Individual marking and labelling
5. ESD: anti-static