

Cabka





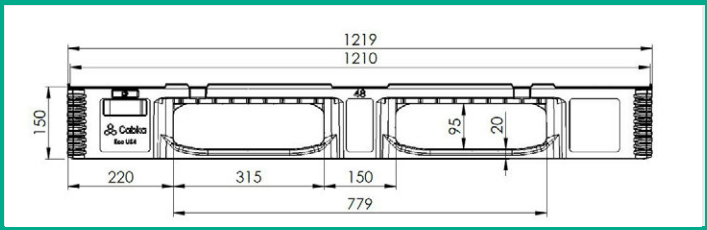

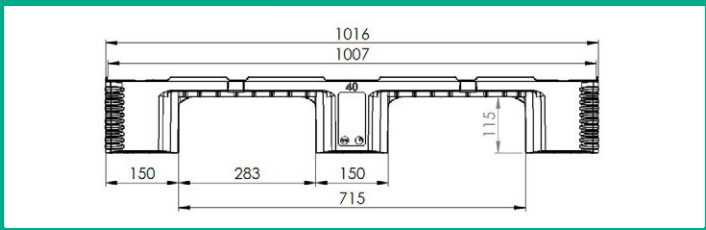

Eco US4

OD-3R

48 x 40 in
1219 x 1016 mm







Technical Data	Bottom support	Top Deck	Dimensions (in) / (mm)	Maximum Load Capacities (lbs) / (kg)			Weight (lbs) / (kg)		
				Static	Dynamic	Racking	PE	PP	PO
Eco US4 (OD-3R)	3 runners	open	48 x 40 x 5.9	30000	4000	1100	30,9	29,8	-
			1219 x 1216 x 150	13600	1800	500	14	13,5	-

Entry: 4 ways | Nesting height: 0 inch / 0 mm | Safety rim: 0.0 in / 0 mm

Logistic Data	Standard Truck Europe		Standard Truck USA		Mega Truck		Jumbo Truck		40´ HC Container	
	stack	total	stack	total	stack	total	stack	total	stack	total
Eco US4 (OD-3R)	16	528	-	-	19	570	20	1560	17	340

Benefits

1. Cost-efficient plastic pallet comparable to wood
2. Durable monoblock design for consistent performance
3. High weight-to-load ratio for efficient handling
4. Suitable for export, pooling, and warehousing
5. Reliable in racking and conveyor systems
6. Reusable pallet made of recycled plastic and 100% recyclable

Options

1. Grommets on and under deck
2. 6 and 22 mm rim options available
3. RFID-ready with protected label pocket
4. Individual marking and labeling

Technical data are guideline values based on experience and tests according to ASTM standard. The data may vary based on intended use, product features, raw materials used and environmental influences. Upon request our sales team will confirm the data required for your individual application.